25 Venesta

## **Award** Low-Level

Versatile, economical and easy to assemble. Award Low-Level gives you a tried and tested bespoke solution that works equally well in wet or dry environments. Plus, it comes in our complete range of 34 laminate finishes.











Access our cubicles in an emergency without the need to remove the door or cause damage to the lock. Watch the video on our YouTube channel.



## Key features

2 door height options
Anti-finger trap hinges
Emergency release indicator bolts
34 laminate colour options
Suitable for wet and dry environments
Simple installation
Economical

- **01** Set back pedestal for floating appearance.
- **02** ABS indicator bolt fascia in Light Grey.

See p26-27 for Award Low-Level technical specifications.

## Main image

Award Low-Level cubicles in Peacock, Cloud and Porcelain.

## Colour finish

MFC, HPL and SGL 34 colours from the standard range. Cubicle hardware Light Grey ABS or satin anodised effect powder coated zinc.

## Edge treatment

MFC and HPL Matching ABS lipping.

Polished black radiused edge.

## Headrail

Rigid satin anodised aluminium headrail with matching end cap.

## Cubicle hardware

Indicator bolt

Easy grip indicator bolt with emergency release facility and concealed fixings.

Hinge

Anti-finger trap satin anodised aluminium rise and fall butt hinge. Outward opening hinge option available.

Pedestal

Height adjustable for uneven floors, with concealed fixings. Where possible, pedestals are fixed to partitions.


Fixing

Partition to wall: Continuous satin anodised aluminium u-channel. Pilaster to partition: Continuous satin anodised aluminium u-channel. Pilaster to wall: Continuous satin anodised aluminium u-channel.


### Accessories

Coat hooks and toilet roll holders available.

## **Technical** Specifying Award Low-Level

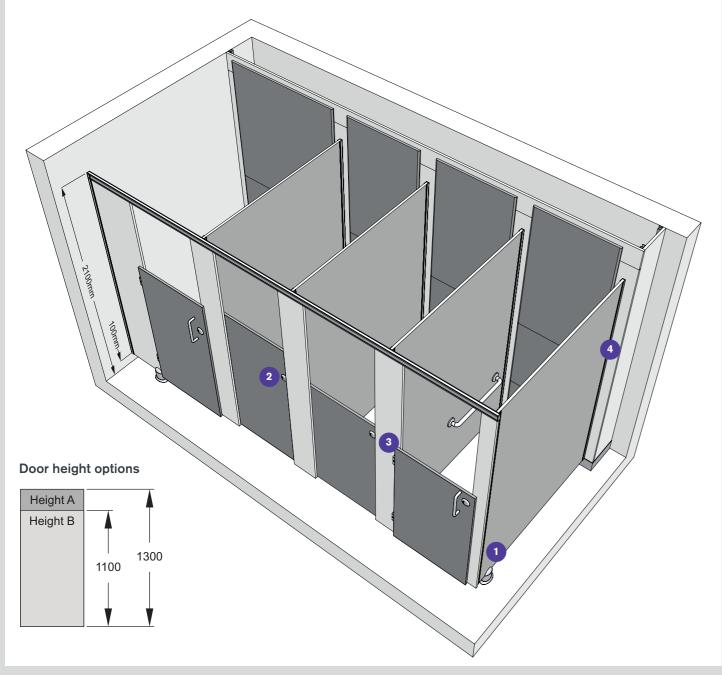









## **Dimensions**

## Overall height

2100mm

## Door height options

Height A 1300mm Height B 1100mm

## Maximum depth

MFC 2097mm HPL 2067mm SGL 1921mm

#### Floor clearance

100mm

For standard height option see p56.

# Performance

Available in three material options, Award Low-Level is suitable for every type of wet or dry environment, allowing you to specify the most appropriate option to meet site requirements and your budget.

For dry environments with low risk of vandalism. Panels are manufactured from 19mm nominal thickness high performance moisture-resistant melamine faced chipboard. Edges lipped ABS.

For more heavily used washrooms, panels are heat, scratch and impact resistant. Manufactured from moistureresistant chipboard faced with high pressure laminate, panels are 19mm nominal thickness. Edges lipped ABS.

## SGL

Solid grade laminate is extremely resistant to impact and all surfaces are impervious to water. Panels are 13mm nominal thickness with polished black radiused edges.

