

# Markwik 21+ Panel Mounted Thermostatic Basin Mixer, Time Flow Sensor with Removeable Spout

## ILLUSTRATED

**A6684** (TB H6) Markwik 21+ panel mounted thermostatic basin mixer, time flow sensor, demountable with removable spout

## OPTIONS

**A6899** Markwik 21+ purging kit for panel mounted thermostatic mixers

## ILLUSTRATED PRODUCT DETAILS

### Weights

**A6684** 3.60 KG

### Finishes


**A6684**  Chrome (AA)

### Materials

**A6684** Chrome Plated Brass

### Special Notes

Mixer Tap is activated by hand movement over the sensor and water will run for a predetermined length of time. Factory pre-set at 1 minute but adjustable. Hygienic automatic flush can be set to occur every 6, 12, 24, 48 or 72 hours. Especially suited to medium and large hospital pattern integral back outlet basins and washing associated with clinical or nursing procedures. Fitted with an Armitage Bioguard outlet which reduces the opportunity for biofilm attachment and is lined with anti-microbial copper. Unique built-in thermal disinfection cleansing feature. Spout is removable for autoclave sterilisation. Body demounts for submergible disinfection. Suitable for high and low pressure systems. Flow rate regulated to maximum of 10 litres per minute. A separate purging kit is available to facilitate initial installation flushing and water sampling.

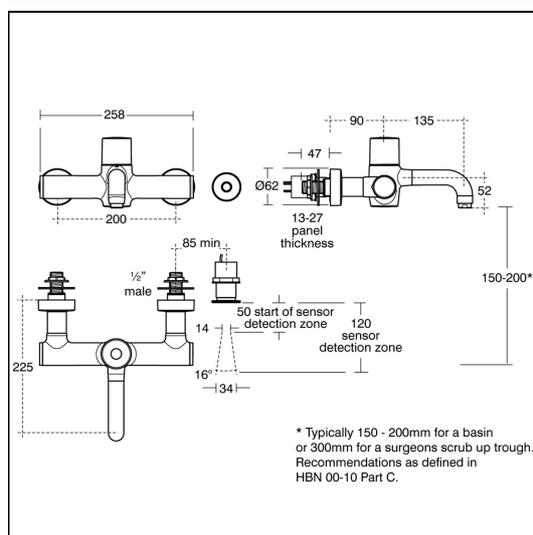

## ACCREDITATIONS



## FEATURES

