

Markwik 21+ Panel Mounted Thermostatic Basin Mixer, Time Flow Sensor

ILLUSTRATED

A6737 (TB H6) Markwik 21+ panel mounted thermostatic basin mixer, time flow sensor, demountable with fixed spout

OPTIONS

A6899 Markwik 21+ purging kit for panel mounted thermostatic mixers

ILLUSTRATED PRODUCT DETAILS

Weights

A6737 3.60 KG

Finishes

A6737  Chrome (AA)

Materials


A6737 Chrome Plated Brass

Standards

HTM 04-01supplement D08, HBN 00-10, TMV3 WRAS

Special Notes

Mixer Tap is activated by hand movement over the sensor and water will run for a predetermined length of time. Factory pre-set at 1 minute but adjustable on site. Hygienic automatic flush can be set to flush the tap every 6, 12, 24, 48 or 72 hours to eliminate stagnancy in the system. Minimum 0.6 bar pressure, regulated flow to a maximum of 10 litres per minute. A separate purging kit is available to facilitate installation flushing and water sampling.

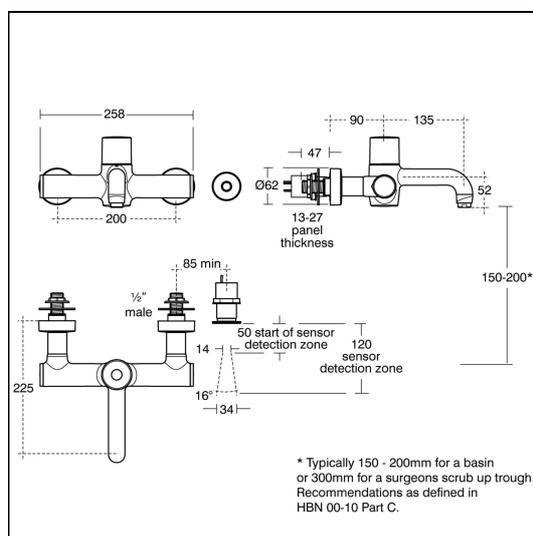

ACCREDITATIONS



FEATURES

