



Thermostatic Clinical Healthcare Sensor Tap with Detachable Spout


Code
SCBW123

Description

Sensor operated sequential thermostatic wall mounted clinical mixer tap with detachable spout.

Features

- Remote sensor operated
- Battery powered.
- 24 hour hygiene flush.
- Full safe touch body
- TMV3 approved thermostatic control
- HTM compliant.
- HBN compliant.
- WRAS approved.
- Integral isolation valves
- Isolation, check valves and filters accessible institute.
- Smooth internal surfaces
- Sterilisation function for the complete tap
- Spout can be removed for autoclaving.
- Detachable spout secured with grub screw.
- 5ltr/min flow regulars fitted to hot & cold inlets
- Purge feature available (additional item required)

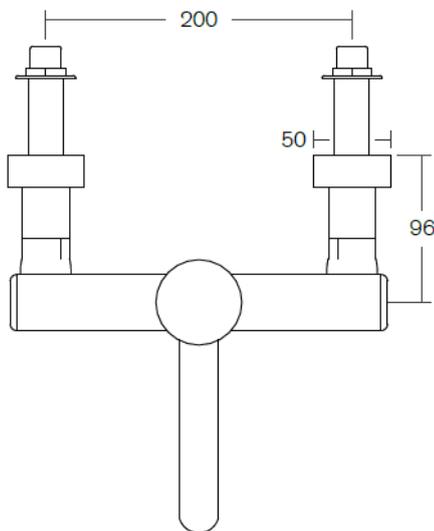

Technical Specification:

Max operating pressure: 10.0 bar static
Min operating pressure: 1.0 bar dynamic
Max inlet temperature: 85°C
Pre-set factory temperature: 41°C

Compatible extra:

SCBW117 : Purge kit for HBN clinical taps
SCBW116: Transformer to mains power.

Finish:
Chrome

