
# **Technical** Specifying Centurion

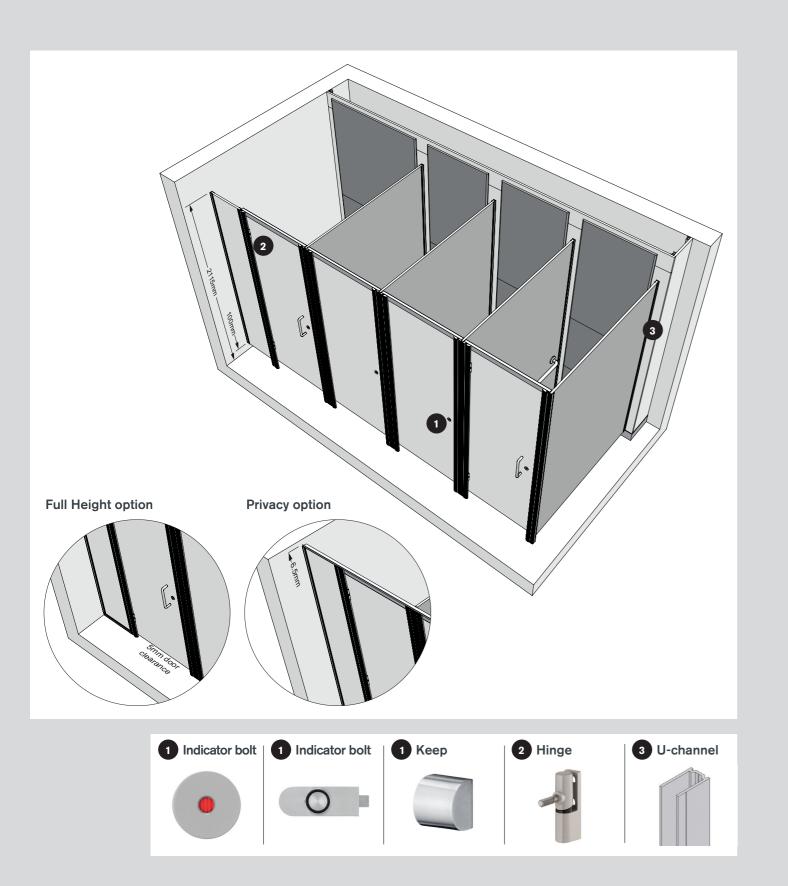

# Dimensions

# Centurion **Overall height** 2100mm

## Maximum depth

MFC HPL SGL

2092mm 2062mm 1922mm

Floor clearance 100mm

Minimum ceiling clearance 20mm

**Centurion Full Height** Maximum height MFC HPL SGL

# 2774mm 2774mm 2774mm

Maximum depth 2040mm

> 2040mm 1922mm

Floor clearance 5mm at doors Omm at partitions and pilasters

Minimum ceiling clearance 20mm

MFC

HPL

SGL

HPL

SGL

MFC

HPL

SGL

**Centurion Privacy** Maximum height MFC

2816mm 2816mm 2816mm

### Maximum depth

2040mm 2040mm 1922mm

Floor clearance 5mm at doors Omm at partitions and pilasters

Minimum ceiling clearance 6.5mm

# Performance

Available in three material options, Centurion is suitable for every type of wet or dry environment, allowing you to specify the most appropriate option to meet the site requirements and your budget.

# MFC

For dry environments with low risk of vandalism. Panels are manufactured from 19mm nominal thickness high performance moisture-resistant melamine faced chipboard. Edges lipped with ABS.

# HPL

resistant. Manufactured from moisture-resistant chipboard faced with high pressure laminate, panels lipped with ABS.

# SGL

Solid grade laminate is extremely resistant to impact and all surfaces are impervious to water. Panels are 13mm nominal thickness with polished black radiused edges.

For more heavily used washrooms, panels are heat, scratch and impact are 19mm nominal thickness. Edges

# Detailing

# Panels and doors

Available in MFC, HPL and SGL.

## Colour finish

MFC, HPL and SGL 34 colours from the standard range. Cubicle hardware Satin andoised aluminium and satin anodised effect powder coated zinc.

## Edge treatment

MFC and HPL Matching ABS lipping. SGL Polished black radiused edge.

## Headrail

High strength extruded satin anodised aluminium headrail.

### Pilasters

High strength extruded fluted satin anodised aluminium pilasters which extend down to floor level and are fixed to floor using mounting blocks.

# Cubicle hardware

Indicator bolt Satin anodised aluminium slide operated bolt with circular face plate and emergency release facility. Faceplate and keep with concealed fixings. Hinge Standard and Full Height: Anti-finger trap satin anodised effect powder coated zinc rise and fall hinge. Outward opening hinge option available. Privacy: Satin anodised effect powder coated zinc 5mm nominal door clearance rise and fall hinge. This is not an antifinger trap hinge. Fixinas Partition to wall: Continuous satin anodised aluminium U-channel. Pilaster to partition: Continuous satin anodised aluminium U-channel. Pilaster to wall: Continuous satin anodised aluminium U-channel. Partition to floor: Continous satin anodised aluminium floor U-channel (for Full Height and Privacy only).

# Accessories

Coat hooks and toilet roll holders available.