


Technical Specifying Sahara Glass

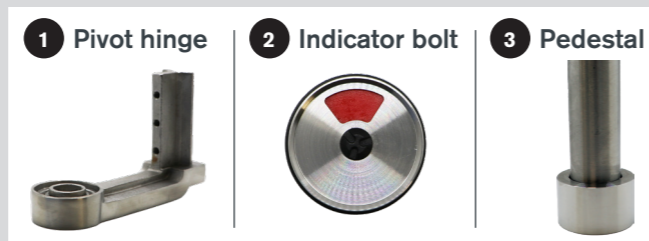

Dimensions

Overall height
2139mm

Maximum height
2909mm

Maximum depth
2086mm

Floor clearance
100mm as standard (also a choice of 50mm or 150mm)

Minimum ceiling clearance
20mm

Performance

Glass

4mm toughened double back painted safety glass available in timeless black or white.

Doors are 44mm nominal thickness high performance Medium Density Fibreboard (MDF) clad with double back painted safety glass. Partitions are 35mm nominal thickness clad with double back painted safety glass.

Detailing

Panels and doors

High performance Medium Density Fibreboard core clad in 4mm toughened double back painted safety glass.

Colour finish

Glass

Black or white.*

Core

Noir or Porcelain.

Cubicle hardware

Satin anodised aluminium, stainless steel and powder coated aluminium.

*Other colours available upon request.

Edge treatment

Glass

Polished.

Core

Lipped with 0.5mm matching ABS.

Pilasters

High strength, slimline extruded satin anodised aluminium pilasters clad in glass, specially designed to conceal fixings.

Headrail

40mm slimline powder coated aluminium in black or white with matching end cap.

Cubicle hardware

Indicator bolt

Stainless steel indicator bolt with slimline mortice lock and unique emergency release function.

Hinge

Stainless steel soft self-closing pilaster mounted pivot hinges, supplied as an assembly.

Pedestal

Stainless steel 100mm height adjustable (+10mm) as standard. Also a choice of 50mm or 150mm height pedestals.

Fixings

Partition to wall: Satin anodised aluminium T-section.
Pilaster to partition: Satin anodised aluminium T-section.
Pilaster to wall: Satin anodised aluminium channel and Z-clip.

Accessories

Coat hooks and toilet roll holders available.