

Portman 21 Washbasin 50cm RH Taphole, No Overflow Or Chainstay Hole

ILLUSTRATED

- S2254** (LB G M) Portman 21 washbasin 50cm, 1 right hand taphole, no overflow, no chainstay hole
- A6696** (TP6) Markwik 21+ 1 hole thermostatic basin mixer, single sequential lever, demountable with copper tails
- S8715** (WT3) Waste 1¼" waste with bead chain & plug 80mm unslotted tail, screw stay
- S8920** (TRR1/P) Trap 1¼" plastic resealing bottle, 75mm seal, multi-purpose outlet

OPTIONS

- E0157** Wall fixing set
- E0062** Basin fixing set for IPS panels or block walls
- A6697** (TP6) Contour 21+ 1 hole thermostatic basin mixer, single sequential lever with copper tails
- S8734** Waste 1¼" brass swivel plug waste, 80mm unslotted tail
- S8720** (WT1) Waste 1¼" brass strainer waste, 80mm unslotted tail
- S8900** Trap 1¼" metal bottle, 75mm seal, outlet screwed 1¼" BSP male with compression nut and ring
- S9137** Bracket concealed with clamps and centre waste support for Portman 21 washbasins 60 and 50cm

ILLUSTRATED PRODUCT DETAILS

Sizes

S2254 w:50 x d:42

Weights

S2254 12.73 KG
A6696 2.50 KG
S8715 0.28 KG
S8920 2.00 KG

Materials

S2254 Vitreous China
A6696 Chrome Plated Brass
S8715 Chrome Plated Metal
S8920 Plastic

Finishes

- S2254**  White (01)
- A6696**  Chrome (AA)
- S8715**  Chrome (AA)
- S8920**  Neutral / No Finish (67)

Flow rates


A6696 7.9 Litres per minute @ 3 bar pressure

Standards

Washbasin to BS EN 14688 & BS EN 31

Special Notes

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. For use in connection with personal washing (face, forearms and hands etc.) not for use in clinical areas. Suggested rim height 780-800mm. The taphole size is 30mm and not suitable for some mixers, please check tap tail thread diameter.

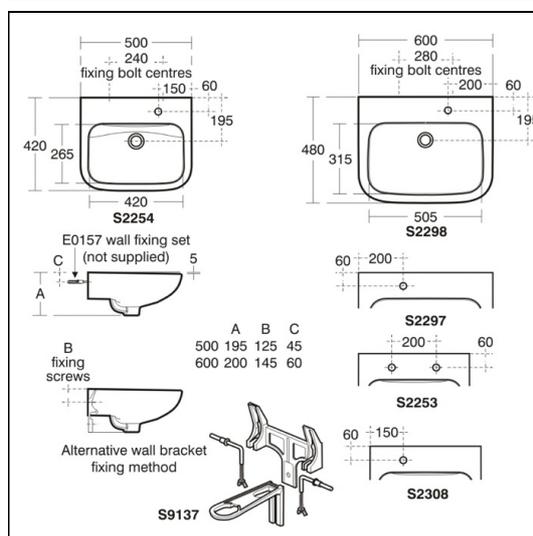

FEATURES

